THREE PHASE INDUCTION MOTOR

TYPE ⇨ TOTALLY ENCLOSED AIR OVER

OUTLINE DIMENSIONS

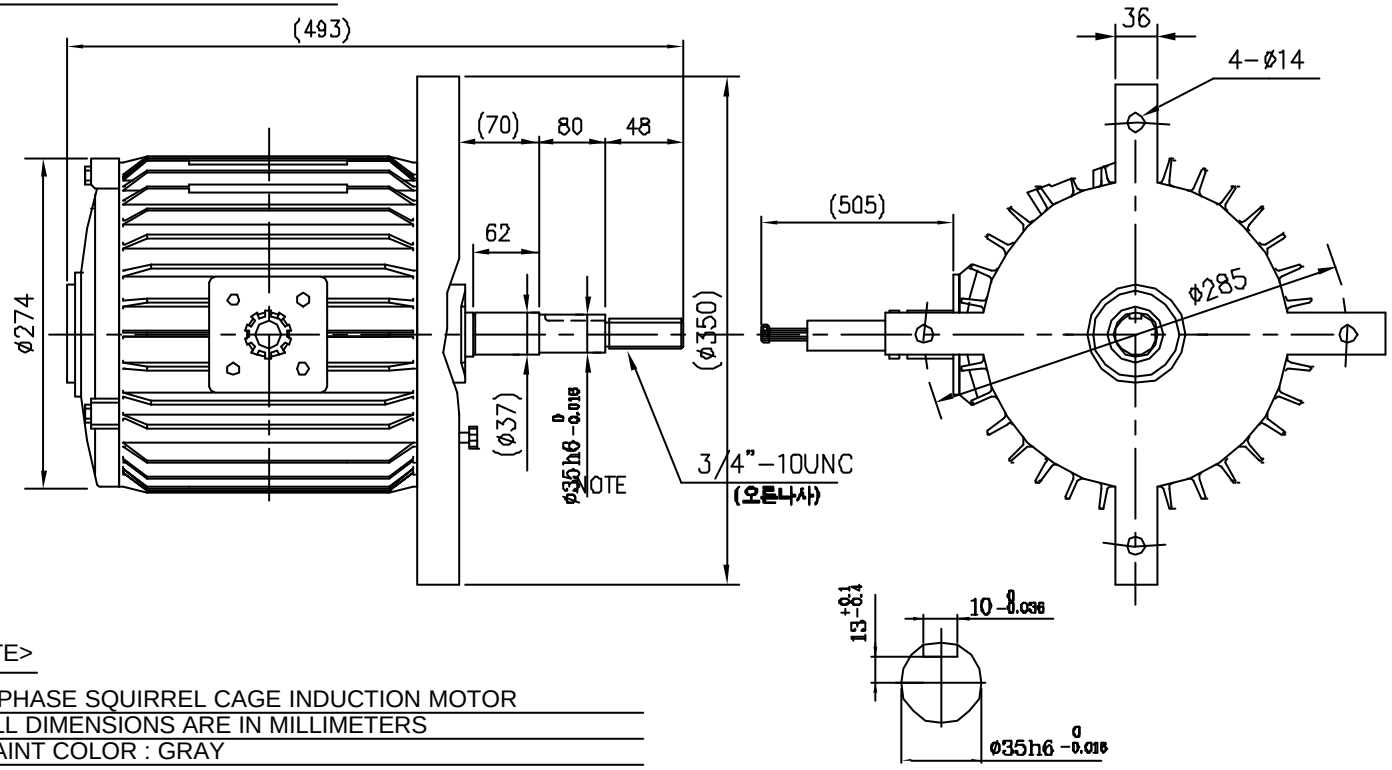

NOTE>

1. 3 PHASE SQUIRREL CAGE INDUCTION MOTOR
2. ALL DIMENSIONS ARE IN MILLIMETERS
3. PAINT COLOR : GRAY

SHAFT EXTENSION

OTHER SPECIAL FEATURES

<참 고>

1. SHAFT 끝단에 NUT 체결.
2. E/B(F) : OIL-SEAL 부착.
3. 모든 접부 액상가스켓 처리.
4. ( )안의 치수는 참고치수임.

GENERAL SPECIFICATIONS

	FRAME NO.	kW	POLE	VOLTS	HZ	INS. CLASS	SERVICE FACTOR	RATING	BEARINGS DRIVE	BEARINGS OPP.DRAVE	APPROX WEIGHT	PROTECTION	MODEL NAME
A	132S	2.2	8	220/380	60	F	1.0	CONT.	6208DD	6206ZZ	71KG	IP54	
B		2.2	8	440	60	F	1.0	CONT.	6208DD	6206ZZ	71KG	IP54	
C													
D													

DRAWING NO.		
PREPEARED	CHECKED	APPROVED
2000.07.24 D.H.KAM	2000.07.24 H.J. KIM	2000.07.24 J.H. KIM

LG·OTIS